



<b>Engine</b>	Cummins 6BTAA5.9-C180
<b>Rated Power</b>	132 kW (177 hp / 180 ps) @ 2,200 rpm
<b>Blade Length</b>	3,660 mm
<b>Maximum Speed</b>	42 km/h
<b>Draw Bar Pull</b>	82 kN
<b>Operating Weight</b>	15,000 kg

# 4165D MOTOR GRADER

TOUGH WORLD. TOUGH EQUIPMENT.

# 4165D SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier 2 / Stage II
Manufacturer	Cummins
Model	6BTAA5.9-C180
Rated Power	132 kW (177 hp / 180 ps) @ 2,200 rpm
Maximum Torque	800 N·m @ 1400 rpm
Number of Cylinders	6
Aspiration	Turbo & air-to-air intercooled

TRANSMISSION	
Transmission Type	power shift
Torque Converter	Single stage, three elements
Maximum Travel Speed, fwd	42 km/h
Maximum Travel Speed, rev	26.5 km/h
Number of Speeds, fwd	6
Number of Speeds, rev	3

AXLES	
Differential Type	Limited slip standard
Final Drive Type	Chain drive
Axle Oscillation	±16°
Front Axle, Wheel Lean Angle	Left / right 18°

STEERING	
Steering Configuration	Load sensing steering
Steering Relief Pressure	17.2 MPa
Minimum Turning Radius	7,200 mm
Steering Angle	±50°
Frame Articulation Angle	±27°

BRAKES	
Service Brake Type	Drum brake
Service Brake Location	Rear axle

TIRES	
Tire Size	17.5-25

HYDRAULIC SYSTEM	
Main Pump Type	Gear
Main Relief Pressure	20 MPa
Main Pump Flow	122 L/min

WORKING CAPACITIES	
Maximum Draw Pull	82 kN
Cutting Pressure	7,300 kg

TANDEM DRIVE PERFORMANCE	
Height	560 mm
Width	210 mm
Center Distance	1,540 mm



MOLDBOARD PERFORMANCE	
Bank Cut Angle	28~74°
Moldboard Lift Above Ground	600 mm
Moldboard Side Shift, left/right	660 / 740 mm
Maximum Sloping Angle	90°
Cutting Depth	680 mm
Circle Rotation	360°
Circle Diameter	1,455 mm
Circle Thickness	140 mm

DIMENSIONS	
Wheelbase	6,230 mm
Overall Length	9,140 mm
Overall Width	2,630 mm
Overall Height with Cab	3,380 mm
Clearance under Front Axle	602 mm
Moldboard Standard Length	3,660 mm
Moldboard Standard Thickness	19 mm
Moldboard Standard Height	610 mm

OPERATING WEIGHTS	
Operating Weight	15,000 kg

SERVICE CAPACITIES	
Fuel Tank	348 L
Engine Oil	18 L
Cooling System	35 L
Hydraulic Reservoir	115 L
Transmission and Torque Converter	33 L
Tandems, each	26 L

OPTIONAL EQUIPMENT	
Rear Ripper	
Front Dozer	
Automatic Leveling System	
Rotary Beacon	
Frictional Flake Worm Box	

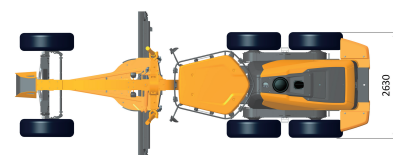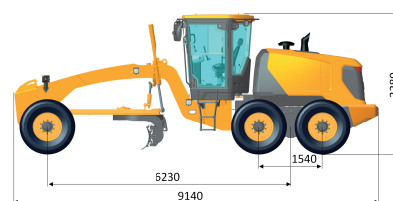

## Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
T: +86 772 3886124 E: overseas@liugong.com  
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

01/2024 Designed by LiuGong  
Replace the previous versions of 04/2023